


L Series

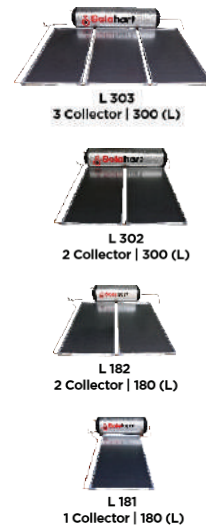

super-shield
ENAMEL TANK PROTECTION

FITUR UTAMA

Solahart Super-Shield™ perlindungan tangki enamel

Garansi Solahart Terpercaya

Ramah lingkungan

Pemeliharaan mudah dan operasi yang handal

Tersedia booster listrik

CAPACITY
 300 (L)
 180 (L)
 *ONLY SHOWER

FAMILY SIZE

SL Series



6 Alur Kolektor

100% Silicone Polymer

PERFORMA TERTINGGI

RAMAH LINGKUNGAN

MENGURANGI PENGGUNAAN ENERGI

12 Alur Kolektor

100% Silicone Polymer

L Series

Popular Generation

Direct Heating System

181 L
 182 L
 302 L
 303 L

5 TAHUN

GARANSI TANGKI

5 TAHUN

GARANSI KOLEKTOR

1 TAHUN

GARANSI SPARE PARTS

SL Series

Popular Generation


Direct Heating System

181 SL
 182 SL
 302 SL
 303 SL

System	181 L	302 L		Tank	180	300		Collector	L	
Weight (full)	271	454	Kg	Capacity	180	300	L	Aperture Area	1.86	m²
Weight (empty)	87	146	Kg	Weight (full)	235	385	Kg	Capacity	2.2	L
Length	2.530	2.530	m	Weight (empty)	55	85	Kg	Weight (full)	28	Kg
Height	0.510	0.510	m	Length	1.490	2.310	m	Weight (empty)	25	Kg
Width	1.690	2.475	m	Height	0.510	0.510	m	Length	1.937	m
Working Pressure	1.000	1.000	kPa	Cylinder Material	Steel 2.5 mm (0.10")			Depth	0.080	m
Collectors	1	2		Cylinder Lining	Primaglaze Ceramic Lining, 2 Coats			Width	1.025	m
				Insulation	Polyurethane Pressure Injected Foam			Working Pressure	1.000	kPa
				Case	Aluminium Marine Grade 0.4 mm			No. Of Riser	6	
				End Caps	Polyurethane: Carbon Black, UV Stabilized			Riser Material	Cu	
				Anode	Magnesium: With Steel Core			Absorber Material	Aluminium 0.31 mm	
				Auxiliary Electric Booster	Type: Cu Sheaft Immersion Ratings (kW) :1.0, 1.8 Supply Voltage (V): 220, 250			Absorber Surface	Special Black Painted	
								Tray Material	Aluminium 0.65 mm	
								Tray Insulation	Glass Wool 50 mm	
								Collector Cover	Low Iron Solar Tempered Glass 3.2 mm	

System	181 SL	302 SL		Tank	180	300		Collector	Super L	
Weight (full)	273	461	Kg	Capacity	180	300	L	Aperture Area	1.86	m²
Weight (empty)	90	152	Kg	Weight (full)	235	385	Kg	Capacity	3.6	L
Length	2.530	2.530	m	Weight (empty)	55	85	Kg	Weight (full)	34.5	Kg
Height	0.510	0.510	m	Length	0.510	0.510	m	Weight (empty)	31	Kg
Width	1.690	2.475	m	Height	0.510	0.510	m	Length	1.937	m
Working Pressure	1.000	1.000	kPa	Length	1.490	2.310	m	Depth	0.080	m
Collectors	1	2		Width	1.025	1.025	m	Width	1.025	m
				Cylinder Material	Steel 2.5 mm (0.10")			Working Pressure	1.000	kPa
				Cylinder Lining	Primaglaze Ceramic Lining, 2 Coats			No. Of Riser	12	
				Insulation	Polyurethane Pressure Injected Foam			Riser Material	Cu	
				Case	Aluminium Marine Grade 0.4 mm			Absorber Material	Aluminium 0.65 mm	
				End Caps	Polyurethane: Carbon Black, UV Stabilized			Absorber Surface	100% Silicone Polymer	
				Anode	Magnesium: With Steel Core			Tray Material	Aluminium 0.65 mm	
				Auxiliary Electric Booster	Type: Cu Sheaft Immersion Ratings (kW) :1.0, 1.8 Supply Voltage (V): 220, 250			Tray Insulation	Glass Wool 50 mm	
								Collector Cover	Low Iron Solar Tempered Glass 3.2 mm	



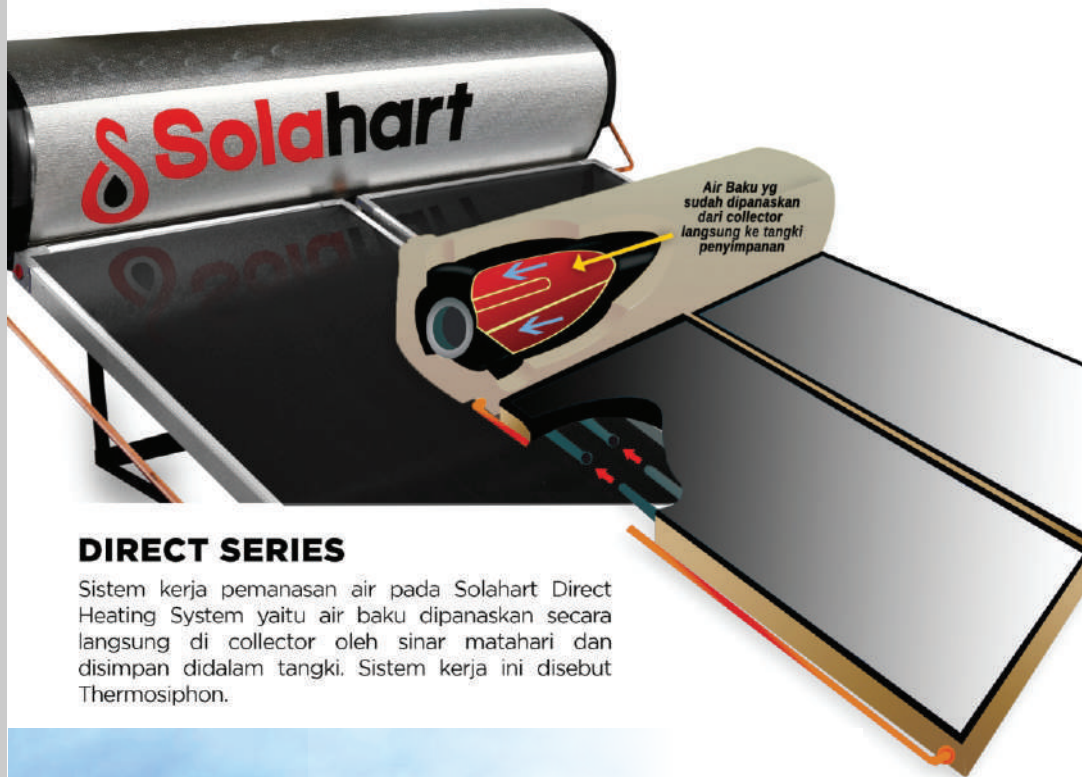

DIRECT SERIES

Sistem kerja pemanasan air pada Solahart Direct Heating System yaitu air baku dipanaskan secara langsung di collector oleh sinar matahari dan disimpan didalam tangki. Sistem kerja ini disebut Thermosiphon.



Jutaan Pengguna

Solahart telah dipakai lebih dari 3 juta orang di 126 negara



Kualitas Terbaik

Solahart Indirect Series dirancang untuk tahan terhadap segala kondisi dan iklim



Quality Control

Setiap komponen Solahart diuji dengan ketat sebelum sampai kerumah anda



Jaringan Luas

Solahart memiliki jaringan penjualan lebih dari 50 dealer di seluruh Indonesia dan team penjualan dan engineering yang sudah terbukti selama puluhan tahun.

@SolahartIndonesia

Solahart Indonesia

Solahart Indonesia

Solahart Indonesia



www.solahart.co.id



DIRECT SERIES

