

FBc Series



FITUR UTAMA

- Solahart Super-Shield™ perlindungan tangki enamel
- Garansi Solahart Terpercaya
- Ramah lingkungan
- Pemeliharaan mudah dan operasi yang handal
- Tersedia booster listrik

CAPACITY
300 (L)

180 (L)

*ONLY SHOWER

FAMILY SIZE



J Series



J 303
3 Collector | 300 (L)



J 302
2 Collector | 300 (L)



J 182
2 Collector | 180 (L)



J 181
1 Collector | 180 (L)



INDIRECT HEATING SYSTEM

INDIRECT HEATING SYSTEM



10 TAHUN GARANSI TANGKI

10 TAHUN GARANSI COLLECTOR

1 TAHUN GARANSI SPARE PARTS

PERFORMA TERTINGGI

RAMAH LINGKUNGAN

TAHAN CUACA DINGIN

MENGURANGI PENGGUNAAN ENERGI

5 TAHUN GARANSI TANGKI


5 TAHUN GARANSI COLLECTOR

1 TAHUN GARANSI SPARE PARTS

System	300		Tank	300		Collector	FBc SERIES	
Weight (full)	498	Kg	Capacity	300	L	Aperture Area	1.86	m ²
Weight (empty)	184	Kg	Weight (full)	417	Kg	Capacity	2.1	L
Length	2.475	m	Weight (empty)	107	Kg	Weight (full)	33	Kg
Height	0.51	m	Height	0.51	m	Weight (empty)	31	Kg
Width	2.31	m	Length	2.43	m	Length	1.941	m
Working Pressure	1000	kPa	Cylinder Material	Steel, low carbon, 2.5 mm (0.1")		Depth	0.08	m
Collectors	2		Cylinder Lining	Primaglaze Ceramic Lining, 2 Coats		Width	1.023	m
Reservoir Tank	✓		Insulation	Polyurethane Pressure Injected Foam		Working Pressure	1400	kPa
			Case	Aluminium: 0.4 mm (0.2")		No. Of Riser	13	
			End Caps	Polypropylene: carbon black, UV stabilised		Riser Material	Copper	
			Anode	Magnesium, sacrificial, with steel core		Absorber Material	Copper	
			Auxiliary Electric Booster	Type: Copper sheath, immersion Rating (kW): 1.0, 1.8 Supply Voltage: 220V - 250V		Absorber Surface	Sputtered selective surface	
						Tray Material	Aluminium 0.65 mm	
						Tray Insulation	Glass Wool 50 mm	
						Collector Glass	Low Iron Solar Tempered Glass 3.2 mm	

System	180	300		Tank	180	300		Collector	J SERIES	
Weight (full)	311	515	Kg	Capacity	180	300	L	Aperture Area	1.87	m ²
Weight (empty)	117	196	Kg	Weight (full)	259	417	Kg	Capacity	3.8	L
Length	2.55	2.55	m	Weight (empty)	71	107	Kg	Weight (full)	49	Kg
Height	0.51	0.51	m	Height	0.51	0.51	m	Weight (empty)	43	Kg
Width	1.8	2.79	m	Length	1.62	2.43	m	Length	1.943	m
Working Pressure	1000	1000	kPa	Cylinder Material	Steel, low carbon, 2.5 mm (0.1")			Depth	0.08	m
Collectors	1	2		Cylinder Lining	Primaglaze Ceramic Lining, 2 Coats			Width	1.027	m
				Insulation	Polyurethane Pressure Injected Foam			Working Pressure	80	kPa
				Case	Aluminium: 0.4 mm (0.2")			No. Of Riser	35	
				End Caps	Polypropylene: carbon black, UV stabilised			Riser Material	Steel	
				Anode	Magnesium, sacrificial, with steel core			Absorber Material	Steel	
				Auxiliary Electric Booster	Type: Copper sheath, immersion Rating (kW): 1.0, 1.8 Supply Voltage: 220V - 250V			Absorber Surface	Black Polyester Powder Coat	
								Tray Material	Aluminium 0.7 mm	
								Tray Insulation	38 mm polyester blanket	
								Collector Glass	Low Iron Solar Tempered Glass 3.2 mm	



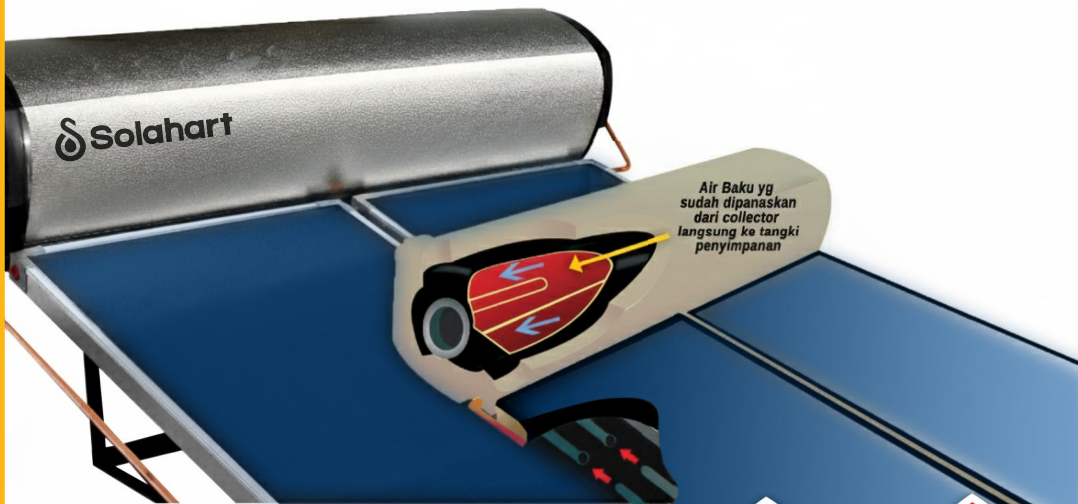

INDIRECT SERIES

Sistem kerja pemanasan air Solahart Indirect Series tidak secara langsung, air didalam tangki dipanaskan oleh media pemanas, media tersebut bersirkulasi (thermosiphon) pada jacket tank (closed circuit). Disaat melalui jacket tank media pemanas tersebut memanaskan air yg disimpan dalam tangki air panas yang akan digunakan keluarga anda.



3 Juta Pengguna

Solahart telah dipakai lebih dari 3 juta orang diseluruh dunia



Kualitas Terbaik

Solahart indirect Series dirancang untuk tahan terhadap segala kondisi dan iklim



Quality Control

Setiap komponen Solahart diuji dengan ketat sebelum sampai kerumah anda



Jaringan Luas

Solahart memiliki jaringan penjualan lebih dari 50 dealer di seluruh Indonesia dan team penjualan dan engineering yang sudah terbukti selama puluhan tahun.

@SolahartIndonesia

Solahart Indonesia

Solahart Indonesia

Solahart Indonesia



www.solahart.co.id



DST23/BU/DES/2025



INDIRECT SERIES

